


NOBEL TRICOFLEX HOSE

Tricoflex Structure

1. Multi-layer construction ensures superb kink resistance.
2. Knitted reinforcement combines pressure resistance with excellent handling characteristics.
3. Smooth inner layer ensures optimum water flow and restricts algae growth.
4. Yellow outer layer is both U.V. and abrasion resistant.

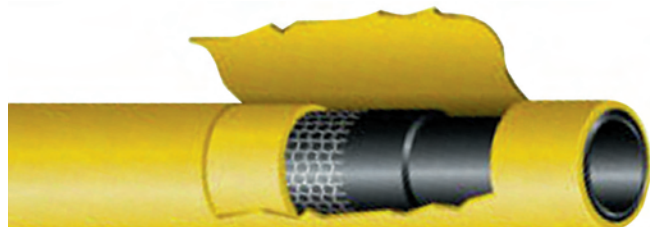

TRICOFLEX WORKING PRESSURE:

1/2" 5/8" 3/4" = 10 Bar (150psi)

1" 1 1/4" 1 1/2" 2" = 8 Bar (119 psi)

TRICOFLEX WORKING TEMPERATURE:

-15°C to 60°C

| CODE | SIZE | COIL Length |
|--------------|---------------|-------------|
| 120.55-12-25 | 1/2" (12.5mm) | 25M |
| 120.55-12-50 | 1/2" (12.5mm) | 50M |
| 120.55-12-99 | 1/2" (12.5mm) | 100M |
| 120.55-15-50 | 5/8" (15mm) | 50M |
| 120.55-15-99 | 5/8" (15mm) | 100M |
| 120.55-19-25 | 3/4" (19mm) | 25M |
| 120.55-19-50 | 3/4" (19mm) | 50M |
| 120.55-19-99 | 3/4" (19mm) | 100M |
| 120.55-25-25 | 1" (25mm) | 25M |
| 120.55-25-50 | 1" (25mm) | 50M |
| 120.55-25-99 | 1" (25mm) | 100M |
| 120.55-32-25 | 1 1/4" (30mm) | 25M |
| 120.55-32-50 | 1 1/4" (30mm) | 50M |
| 120.55-40-25 | 1 1/2" (40mm) | 25M |
| 120.55-40-50 | 1 1/2" (40mm) | 50M |
| 120.55-50-25 | 2" (50mm) | 25M |
| 120.55-50-50 | 2" (50mm) | 50M |

QUICK COUPLING (HOSETAIL)

| CODE | HOUSE Diameter (") |
|--------------|--------------------|
| 120.13-50-12 | 1/2" |
| 120.13-50-19 | 3/4" |
| 120.13-50-25 | 1" |
| 120.13-50-32 | 1 1/4" |
| 120.13-50-40 | 1 1/2" |



MALE QUICK COUPLING

| CODE | BSP "Male |
|--------------|-----------|
| 120.13-70-12 | 1/2" |
| 120.13-70-19 | 3/4" |
| 120.13-70-25 | 1" |
| 120.13-70-32 | 1 1/4" |
| 120.13-70-40 | 1 1/2" |



FEMALE QUICK COUPLING

| CODE | BSP "Female |
|--------------|-------------|
| 120.13-60-12 | 1/2" |
| 120.13-60-19 | 3/4" |
| 120.13-60-25 | 1" |
| 120.13-60-32 | 1 1/4" |
| 120.13-60-40 | 1 1/2" |



QUICK COUPLING CAP

| CODE | DESCRIPTION |
|--------------|-------------|
| 120.13-80-00 | Cap |



QUICK COUPLING SEAL

| CODE | DESCRIPTION |
|--------------|-------------|
| 120.13-90-00 | Seal |



Y QUICK COUPLING

| CODE | DESCRIPTION |
|--------------|-------------|
| 120.13-95-05 | Y |



SEALS (Inner) FOR FEMALE QUICK COUPLINGS

| CODE | BSP "Female |
|--------------|-------------|
| 120.13-60S12 | 1/2" |
| 120.13-60S19 | 3/4" |
| 120.13-60S25 | 1" |
| 120.13-60S32 | 1 1/4" |
| 120.13-60S40 | 1 1/2" |

This is a selection of our irrigation products. For a full listing see the Irrigation section on our website www.dekerhort.ie